


ELECTRICAL SPECIFICATIONS

L(1-3),(2-4) - 35 μ H MIN at .1 VRMS, 400 KHz.


TR&Ø(1-3):(2-4) - 1:1 ±1% at 1 VRMS, 10 KHz.

Self Resonant Freq. - 8.5 MHz MIN.

Dielectric Strength - 500 VRMS, two seconds MIN from 1-to-2.

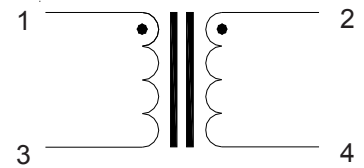

MECHANICAL SPECIFICATIONS

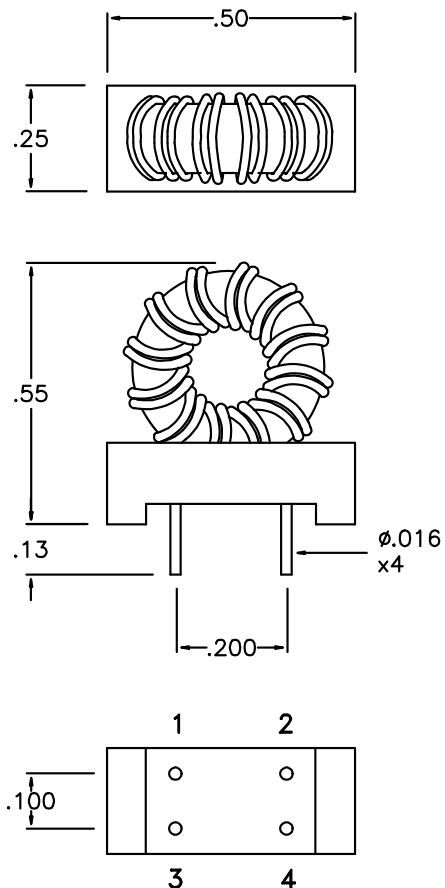

	INIT.	DATE	CAGE 09349	MAGNETIC CIRCUIT ELEMENTS INC. www.MCEmagnetics.com, ph. 831-757-8752, fax 831-757-5478				
PROD.	C P	8-28-15		COMMON MODE CHOKE				
ENG.	J C	8-28-15						
Q.A.			TEST CONDITION 20° ± 5° C	DECIMALS (IN.) .XX = ± .03 .XXX = ± .010	VOLTS ±5%	FREQUENCY ±5%	SIZE A	DWG. NO. O-1978L2
REV.								

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION. ALL INFORMATION MUST BE RETAINED IN CONFIDENCE AND MAY NOT BE USED OR INCORPORATED ANYWHERE WITHOUT THE EXPRESS WRITTEN PERMISSION OF MAGNETIC CIRCUIT ELEMENTS, INC.